


Specifications

Port Sizes	1¼", 1½", 2"
Thread Styles	NPT, BSPT, BSPP
Flow Capacity	300/400/ 700 scfm @ 100 PSI
Filter Capacity	0.01 Micron & larger
Differential Pressure	< 2.5 PSID at rated flow
Max Temp/ Pressure	
Aluminum Bowl	175 °F/200 PSIG
Approx. Weight (lb.)	58.0/60.0/64.0
ISO Class	1 Particulate/Oil

For higher pressure applications, consult factory.
 Units equipped with differential pressure indicator have max temperature and pressure of 125 °F and 150 PSIG, regardless of bowl material.





Water
Dirt
Oil
Oil Vapor
Odor



Replacement Parts & Accessories

Description	Part Number
A Replacement Element, 1st Stage	BW300/BW400/BW700
B Replacement Element, 2nd Stage	BC300/ BC400/ BC700
C Differential Pressure Indicator	N32-W1-DPI
C Blanking Cap (Cover for Indicator)	N32-95-020
D Manual Drain, Ball Valve	BV-051
E Automatic Float Drain	N32-95-XD8
F Bowl O-ring	N32-F35-OR

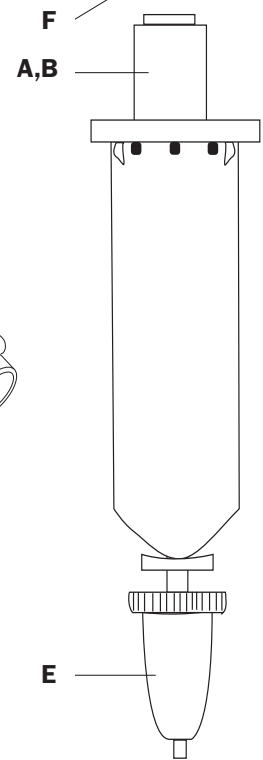

Order Guide

	Port Size	Model Number			Dimensions (inches)		
		Low Flow	Med Flow	High Flow	Height*	Width	Depth
Manual Brass Petcock Drain	1¼"	BC300M10DCM	BC400M10DCM	BC700M10DCM	28.0	16.5	7.8
	1½"	BC300M12DCM	BC400M12DCM	BC700M12DCM	28.0	16.8	7.8
	2"	BC300M16DCM	BC400M16DCM	BC700M16DCM	28.0	17.0	7.8
Automatic Float Drain	1¼"	BC300M10DCA	BC400M10DCA	BC700M10DCA	32.0	16.5	7.8
	1½"	BC300M12DCA	BC400M12DCA	BC700M12DCA	32.0	16.8	7.8
	2"	BC300M16DCA	BC400M16DCA	BC700M16DCA	32.0	17.0	7.8

*To add an indicator, add "i" to end of model number (Indicator adds about 1" to height)